



# Sports Series Mesh Grille

## Tools Required

- Flat Head Screwdriver
- Phillips Head Screwdriver
- 10mm Socket
- Ratchet & Extensions

## Hardware Contents

- (3) 1/4" Lock Washers
- (3) 1/4" Bolts
- (3) L Brackets

**45452 - 47452**  
**2013-2014 Ram HD**



PLEASE READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE INSTALLATION. Auto makers offer varied models to each vehicle and occasionally manufacture more than one body style of the same model. To assure your part is correct, our tech department can be contacted at [tech@texlillet.com](mailto:tech@texlillet.com) to verify, fitment or assist with tech questions. All other inquiries can be directed to [info@texlillet.com](mailto:info@texlillet.com). In the event you do not have internet access please call 1-800-287-5900. NOTE: We recommend painting all areas exposed behind grille black prior to installing for best results.



### Step 1

Remove four plastic pop clips from the top of the plastic radiator cover. Remove the radiator cover.




### Step 3

On the back edge of the bumper steel metal there are holes. Take the three bolts and washers and insert them through the holes in the bumper with the threads facing forward. Do not tighten bolts fully. NOTE: If your trucks has a factory grille remove the factory grille first..



### Step 2

Remove four 10mm bolts from the top of the factory grille where it attached to the core support. Pull the factory grille off by pulling from the bottom corner edges up and forward.

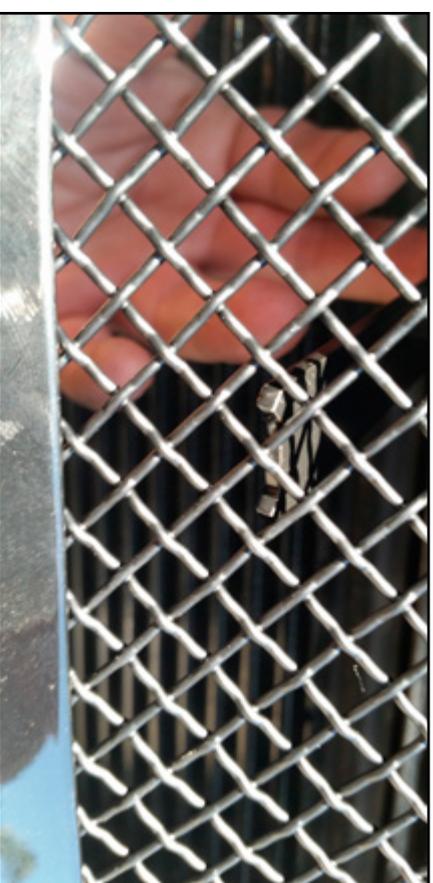

### Step 4

Place the mesh grille in the back of the bumper up against the opening. Position the L brackets against the mesh as shown. Secure the grille in place by tightening the bracket screws. The tension will keep the grille in place. Reinstall the factory grille. Your installation is now complete.



# Sports Series Mesh Grille

## 45452 - 47452

### 2013-2014 Ram HD

PLEASE READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE INSTALLATION. Auto makers offer varied models to each vehicle and occasionally manufacture more than one body style of the same model. To assure your part is correct, our tech department can be contacted at [tech@trexillet.com](mailto:tech@trexillet.com) to verify, fitment or assist with tech questions. All other inquiries can be directed to [info@trexillet.com](mailto:info@trexillet.com). In the event you do not have internet access please call 1-800-287-5900. NOTE: We recommend painting all areas exposed behind grille black prior to installing for best results.



**Bracket Position**  
Bracket location from left to right (facing front of vehicle)



**Bracket Position**  
Bracket location from left to right (facing front of vehicle)