

671949X
2014 TOYOTA
4 RUNNER



671949X
2014 TOYOTA
4 RUNNER

2014 TOYOTA 4 RUNNER

X-Metal 3 Pc. Grille Kit


Installation time: 30 min.

TOOLS REQUIRED:

Flat/Phillips Screwdrivers
Socket Set

PARTS LIST

(3) Mesh Grilles
(9) "1 Black Fender Washers
(9) 6/32" Nylon Lock Nuts
(5) 3/16x1/2 Nylon Spacers

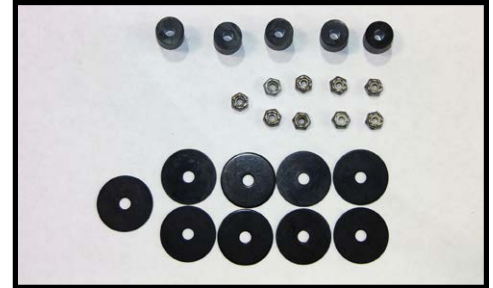

PLEASE READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE INSTALLATION. Auto makers offer varied models to each vehicle and occasionally manufacture more than one body style of the same model. To assure your part is correct; our tech department can be contacted at tech@trexbillet.com to verify fitment or assist with tech questions. All other inquires can be directed to info@trexbillet.com. In the event you do not have internet access please call 1-800-287-5900.

Step 1 Radiator Cover Removal

Take a flat screwdriver and press down on the center portion of of 13 plastic pop clips located on the top of the plastic radiator cover and remove the plastic pop clips from the radiator cover (Fig 1). Remove the radiator cover, this will give you access to the rear of the factory grille.



Step 2 Upper 2 pc. Grille Installation

Place the two mesh grilles into the factory grille openings (Fig 2). The threaded studs on the back of the mesh grilles will insert through the factory grille.



671949X 2014 TOYOTA 4 RUNNER



671949X 2014 TOYOTA 4 RUNNER

Step 3

Reach down behind the factory grille and locate the threaded studs on the back of the mesh grille, they should have inserted through the factory grille. Take four flat washers and install them onto each of the upper grille threaded studs, take four nylon lock nuts and install them after the washers onto the threaded studs and tighten (Fig 3). The upper mesh grilles are now complete.



Fig 3

Step 4 Lower Grille Installation

Place the five black plastic spacers from the parts bag onto the five threaded studs on the back of the bumper mesh grille (Fig 4).



Fig 4

Step 5

Insert the mesh grille into the factory bumper opening, the side of the mesh grille with two threaded studs will be on the top and the side with three welded studs will be on the bottom (Fig 5). Fully insert the mesh grille into the bumper opening, the threaded studs will insert through the factory grille.



Fig 5

**671949X
2014 TOYOTA
4 RUNNER**



**671949X
2014 TOYOTA
4 RUNNER**

Step 6

Reach down behind the factory grille and locate the threaded studs on the back of the bumper mesh grille, they should have inserted through the factory grille. Take five flat washers and install them onto each of the bumper mesh grille threaded studs, take five nylon lock nuts and install them after the washers onto the threaded studs and tighten (Fig 6). The bumper mesh grille is now complete. Reinstall the plastic radiator cover and the plastic pop clips. Installation complete.

